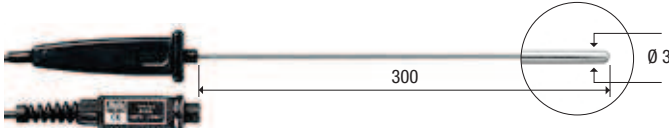

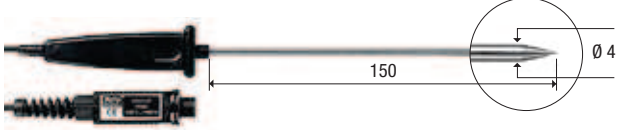

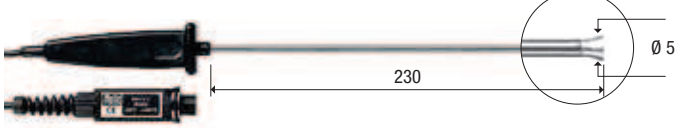

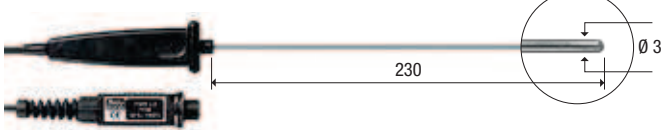

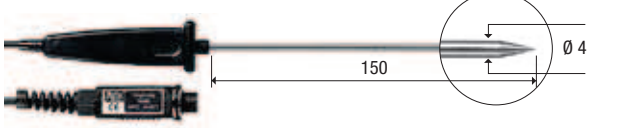

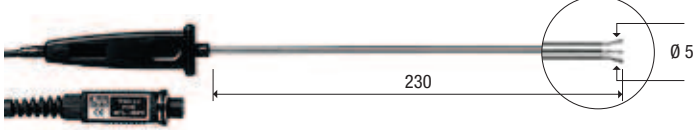

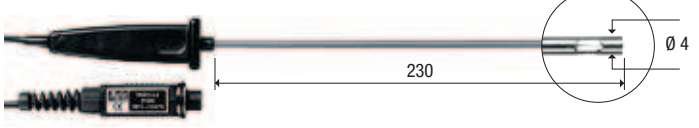

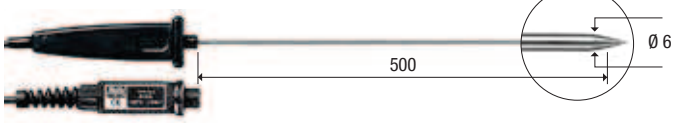

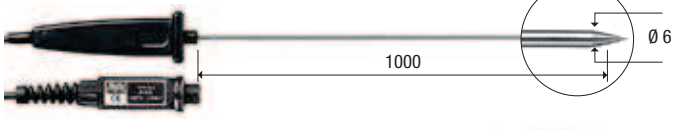



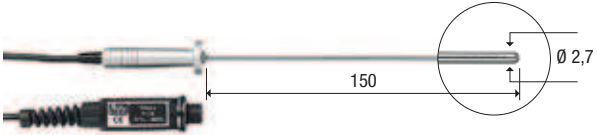

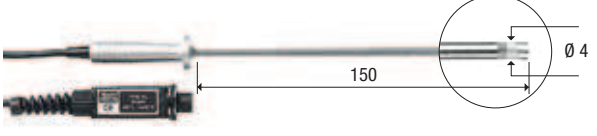

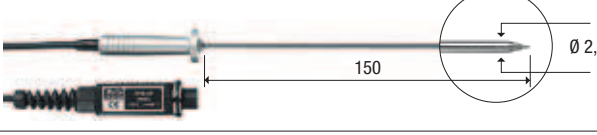

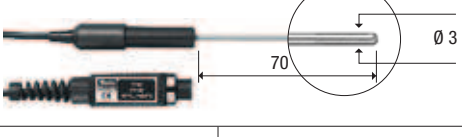

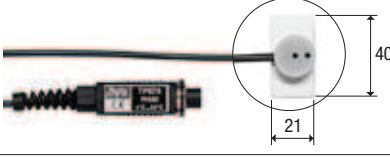

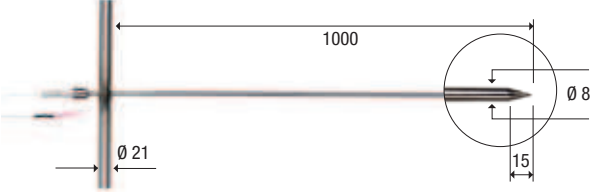



## PT100 PROBES FOR PORTABLE INSTRUMENTS EQUIPPED WITH SICRAM MODULE

CODE	°C max	$\tau$ s	DIMENSIONS	USE
TP 472 I	-196 +500	3s		
TP 473 P	-50 +400	5s		
TP 474 C	-50 +400	5s		
TP 472 I.0	-50 +400	3s		
TP 473 P.0	-50 +400	5s		
TP 474 C.0	-50 +400	5s		
TP 475 A.0	-50 +250	12s		
TP 472 I.5	-50 +400	3s		
TP 472 I.10	-50 +400	3s		

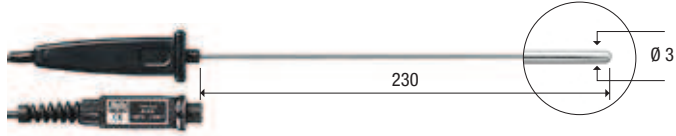

Temperature



## Pt100 PROBES FOR PORTABLE INSTRUMENTS EQUIPPED WITH SICRAM MODULE

CODE	°C max	$\tau$ s	DIMENSIONS		USE
TP 49 A	-70 +400	3,5s			
TP 49 AC	-70 +400	5,5s			
TP 49 AP	-70 +400	4s			
TP 87	-50 +200	3s			
TP 878	+5 +80	60s	Contact probe for solar panels. Cable L = 2m.		
TP 878.1	+5 +80	60s	Contact probe for solar panels. Cable L = 5m.		
TP879	-20 +120	60s	Penetration probe for compost. Cable L = 2m 		
TP 875	-30 +120	15s	Globe-thermometer probe for measuring radiant heat $\varnothing$ 150 mm. (ISO7243, ISO7726). 4 wires Pt100 Sensor cable L=2m. <b>Equipped with SICRAM module.</b>		
TP 876	-30 +120	15s	Globe-thermometer probe for measuring radiant heat $\varnothing$ 50 mm. (ISO7243, ISO7726). 4 wires Pt100 Sensor cable L=2m. <b>Equipped with SICRAM module.</b>		

## Pt100 / Pt1000 SENSOR PROBES WITH TP 47 MODULE

CODE	°C max	$\tau$ s	DIMENSIONS		USE
TP 47.100 (Pt100) TP 47.1000 (Pt1000)	-50 +400	3s			
TP 47	Only connector for connection of probes without SICRAM module: direct 3 and 4 wires Pt100, 2 wires Pt1000.		